

Zero Clearance Gas Fireplace
HBZDV4232/3632

Direct Vent Gas Fireplace




The ultimate in design, engineering & quality

Model HBZDV4232/3632 Specifications

Corner Framing Dimensions (inches)

Louvered			Clean View Circulating Kit (CVCK)		
	HBZDV36	HBZDV42		HBZDV36	HBZDV42
A	54 ¹³ / ₁₆ "	58 ¹³ / ₁₆ "	A	59 ⁷ / ₈ "	63 ¹³ / ₁₆ "
B	36 ³ / ₈ "	42 ³ / ₈ "	B	38 ⁷ / ₁₆ "	42 ⁷ / ₁₆ "
C	36"	42"	C	38 ¹ / ₆ "	42 ¹ / ₆ "
D	9 ³ / ₁₆ "	8 ¹ / ₄ "	D	10 ¹¹ / ₁₆ "	10 ¹ / ₁₆ "
E	38 ³ / ₄ "	41 ⁵ / ₈ "	E	42 ³ / ₁₆ "	45 ¹ / ₈ "
F	12 ³ / ₈ "	13 ³ / ₄ "	F	12 ³ / ₈ "	13 ³ / ₄ "
G	17 ⁹ / ₁₆ "	19 ¹ / ₂ "	G	17 ⁹ / ₁₆ "	19 ¹ / ₂ "
H	27 ³ / ₈ "	29 ⁷ / ₁₆ "	H	29 ¹⁵ / ₁₆ "	31 ⁷ / ₈ "

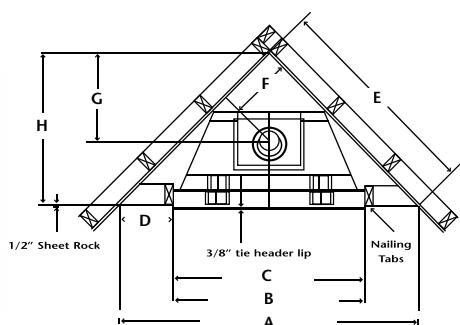

Top Flue Model	Height		Front Width		Depth	
	Actual	Framing	Actual	Framing	Actual	Framing
Louvers						
HBZDV36	34 ¹³ / ₁₆ "	35"	36"	36 ³ / ₈ "	16 ⁷ / ₁₆ "	17"
HBZDV42	37"	37 ¹ / ₈ "	42"	42 ³ / ₈ "	16 ⁷ / ₁₆ "	17"
Clean View Circulating Kit (CVCK)						
HBZDV36	34 ¹¹ / ₁₆ "	41"	38 ¹ / ₁₆ "	38 ⁷ / ₁₆ "	18 ⁷ / ₈ "	19 ¹ / ₂ "
HBZDV42	36 ¹³ / ₁₆ "	43"	42 ¹ / ₁₆ "	42 ⁷ / ₁₆ "	18 ¹⁵ / ₁₆ "	19 ¹ / ₂ "

Top Flue Model	Width	Height
Viewing Area		
HBZDV36	29 ³ / ₄ "	18 ⁵ / ₈ "
HBZDV42	33 ³ / ₈ "	20 ³ / ₈ "



Kingsman Industries maintains a program of continuous testing refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.

Certification: The models HBZDV3632/4232 are certified to ANSI Z21.88b-2003/CSA-2.33b-2003, CAN/CGA 2.17-M91, CSA P.4.1-02 vented gas fireplace heater.



Model	HBZDV3632N HBZDV4232N	HBZDV3632LP HBZDV4232LP
Flue	top	top
Fuel	natural	propane
Input Max.	30,500 BTU	29,000 BTU
Input Min.	20,600 BTU	22,200 BTU
Output Max.	22,875 BTU	21,750 BTU
Efficiency	75%	75%
FE (P4.1-02)	60.9%/56.8%	62.4%/56.8%

Standard Features

- Millivolt valve system allows operation during a power failure with Hi/low heat and flame adjustment
- Dual burner with Realistic Flame Pattern
- A flame sensor that constantly monitors the pilot flame and provides 100% gas shut off if pilot is not sensed

Optional Features

Designer Clean View Circulating Kit – (No Louvers Required), Optional Pull Screens

Decorative Black Panels or Grills – Grills available in Black or Classic Series Black with Polish Brass, Antique or Chrome Accents

Overlay Doors – Deluxe, Top Half, Double Arch and Double Door

Designer Doors – Arch or Straight Black Doors with Antique, Polished or Chrome Trims

Surrounds Wide (Louvered Units) - Polish Brass, Antique or Chrome
Coverage – HBZDV3632 – 35¹/₂" h x 41¹/₈" w
 HBZDV4232 – 37³/₈" h x 45¹/₈" w

Surrounds Slim Line (Louvered Units) - Polish Brass, Antique Brass, Chrome or Gun Metal Black,
Coverage – HBZDV3632 – 35¹/₄" h x 37¹/₂" w
 HBZDV4232 – 37³/₈" h x 43³/₈" w

Fan Kit – Heat activated with variable speed control

Brick Refractory Liner – Traditional or Herringbone

Thermostat – Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control – On/Off, Thermostat On/Off, Hi/Lo On/Off

Child Safety Screen

This unit illustrated is a HBZDV3632N Zero Clearance Direct Vent Natural Gas Fireplace, with LOGC60 Log Set - Optional HB36RLH Herring Bone Refractory Liner and HB36DD51BL Designer Straight Door.

